

ANTI-MOULD ACRYLIC PAINT

MOULD INHIBITING COATING WHICH PROTECTS AGAINST ALGAL AND FUNGAL GROWTH

PERFORMANCE ADVANTAGES

- > Washable and durable
- > Mould inhibiting
- > Protects against algal and fungal growth
- > Smooth matt or satin finish
- > Can be left as a finish in its own right where conditions are conducive to mould growth

USES

For use on interior walls, wall cavities, ceilings, trim, doors, and related paintable surfaces. Ideal for bathrooms, basements, kitchens, laundry rooms, closets, locker rooms, enclosed porches and pool areas or any interior where mould and mildew is a concern. Great for institutional or commercial use in schools, hospitals, hotels, nursing homes, restaurants, athletic facilities, etc.

- > Can be brush, roller or airless spray applied.
- > For interior use only.


NOTE: THIS DOES NOT REMOVE THE NEED TO REPAIR ANY STRUCTURAL FAULTS WHICH ALLOW WATER TO PENETRATE INTO THE FABRIC OF THE WALL.

COLOUR RANGE


- > White, Magnolia

PACK SIZE

- > 2.5 Litres, 5 Litres

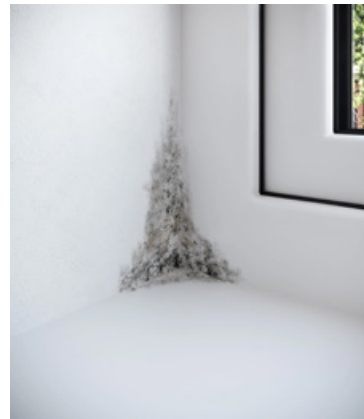

BEFORE

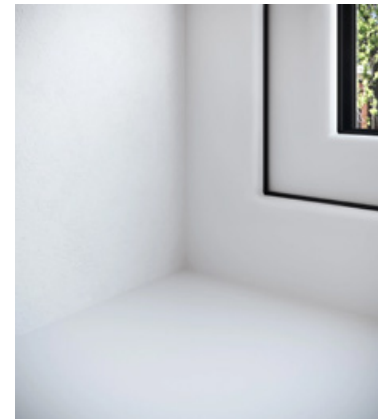

AFTER

FINISH

- > Matt, Satin

SPREADING RATE

- > Up to 11 square meters per litre depending on the moisture and porosity of the surface being painted.
- > Apply 2 coats.

IT IS IMPORTANT TO ENSURE THAT THIS TOTAL FILM THICKNESS IS ACHIEVED - DO NOT OVERSPREAD.

DRYING TIME

- > Dries in 2 hours. Apply the second coat 2 hours or longer after the first.
- > Scrape-resistance over glossy surfaces develops in 5 to 7 days after Britannia Anti-Mould Acrylic Paint cures.
- > If used above tile on shower walls, wait at least 24 hours before using shower.
- > Do not scrub the new coating for seven days.

SHELF LIFE

- > Up to 12 months if stored correctly in an unopened container.
- > Store within the temperature range 5°C - 25°C
- > **PROTECT FROM FROST**

PREPARATION

- > All surfaces to be painted should be clean, dry and free from loose and flaking material.
- > Rub down previously gloss painted surfaces with fine waterproof abrasive paper and rinse thoroughly.
- > Avoid the inhalation of dust.
- > Wear a suitable face mask if dry sanding.
- > Treat any mould or lichen with Britannia's Fungicidal Wash Solution before removing with a scraper or stiff brush, then treat again.

APPLICATION

- > **STIR WELL BEFORE USE.**
- > Ensure maximum ventilation during application and drying.
- > Do not breathe spray, wear respiratory protection.
- > Seal absorbent surface with a first coat thinned down with up to 10% clean water.

LIMITATIONS

- > Anti-Mould Acrylic Paint is not intended for application to floors or any surface subject to water immersion or prolonged contact with water including shower enclosures, saunas or steam rooms.
- > Not recommended for use in HVAC duct work.

CLEANING

- > Remove as much product as possible from application equipment before cleaning.
- > Replace lid firmly.
- > Clean equipment immediately after use with warm soapy water and rinse thoroughly.

PRECAUTIONS

- > Keep out of reach of children.
- > In case of contact with eyes wash immediately with plenty of water.
- > Remove splashes from skin with soap and water or a recognised hand cleaner.
- > Protect from freezing.
- > Do not apply when the air or substrate temperatures are likely to fall below 10°C.
- > Do not use near fishponds.

HEALTH AND SAFETY

- > Please refer to the Safety, Health and Environmental Information on the container.
- > Take special precautions during the surface preparation of pre 1960's painted surfaces as they may contain harmful lead.
- > For further information contact the Britannia Sales Line on 01606 834015.
- > When preparing the surfaces avoid the inhalation of dust and/or metal particles.
- > Wear a suitable facemask.
- > Store in secure dry conditions inaccessible to children or animals.
- > Containers should be kept closed during storage.
- > Do not empty into drains, watercourses or access routes to septic tanks.
- > Britannia Anti-Mould Acrylic Matt contains biocides to protect the dried film from fungal degradation. Once dried the paint film is classified as a treated article and contains the surface biocides 2-Octyl-4-isothiazolin-3-one and 2-methylisothiazol-3(2H)-one.
- > Product approved under BPR

Material Safety Data Sheets for this and all other Britannia Paints products are freely available from the place of purchase or the address below.

GENERAL INFORMATION

- > Apply all products in accordance with BS 6150: Code of practice for painting of buildings and BS 8000: Part 12: 1989 Code of practice for decorative wallcoverings and painting.
- > Under normal and frost free conditions this product will remain usable for up to one year if stored correctly and unopened.
- > Every care is taken to ensure that all information provided on this Technical Data Sheet is accurate.
- > Britannia Paints are unable to guarantee results as it has no control over the conditions under which its products are applied.
- > For help or more information contact the Customer Relations Team on 01606 834015.
- > Before using this product please ensure you have the latest information.
- > The information is correct at date of issue March 2023.

WARRANTY

- > The contents are warranted to be free of defects for three years from the date of manufacture.
- > All warranties and guarantees are limited to the replacement or refund value of the product actually used when supported by proof of purchase.
- > Directions are as complete as possible but cannot encompass all conditions, applications and/or surfaces beyond our control.
- > If you have a question, please contact Britannia Paints Ltd.



Certificate Number 8516
ISO 9001



Unit 7/8 King Street Trading Estate, Middlewich, Cheshire CW10 9LF
T: 01606 834015 F: 01606 837006 E: sales@britanniapaints.co.uk www.britanniapaints.co.uk